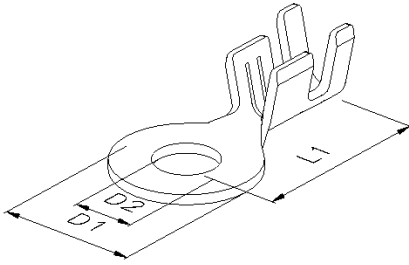


HS United European Connectors

| Ringkabelschuh | Artikel-Nr. | Leiter- quer- schnitt | Material | Ober- fläche | L1 | D1 | D2 | Mate- rial- stärke | Verp.- Ein- heit |
|---|-------------|-----------------------------|----------|-----------------|-----|-----|-----|--------------------------|------------------------|
| | | mm ² | | | mm | mm | mm | mm | |
|  <p>Längstransport</p> | 22.760.110 | 0,5 – 1,0 | CuZn | blank | 9,5 | 7 | 2,7 | 0,5 | 10.000 |
| | 22.760.120 | | CuZn | Sn | | | | | |
| | 22.760.310 | | CuSn | blank | | | | | |
| | 22.760.320 | | CuSn | Sn | | | | | |
| | 23.060.110 | 0,5 – 1,0 | CuZn | blank | 9,5 | 7 | 3 | 0,5 | 10.000 |
| | 23.060.120 | | CuZn | Sn | | | | | |
| | 23.060.310 | | CuSn | blank | | | | | |
| | 23.060.320 | | CuSn | Sn | | | | | |
| | 23.160.110 | 0,5 – 1,0 | CuZn | blank | 9,5 | 7 | 3,1 | 0,5 | 10.000 |
| | 23.160.120 | | CuZn | Sn | | | | | |
| | 23.160.310 | | CuSn | blank | | | | | |
| | 23.160.320 | | CuSn | Sn | | | | | |
| | 23.360.110 | 0,5 – 1,0 | CuZn | blank | 9,5 | 7 | 3,3 | 0,5 | 10.000 |
| | 23.360.120 | | CuZn | Sn | | | | | |
| | 23.360.310 | | CuSn | blank | | | | | |
| | 23.360.320 | | CuSn | Sn | | | | | |
| | 23.860.110 | 0,5 – 1,0 | CuZn | blank | 9,5 | 7 | 3,8 | 0,5 | 10.000 |
| | 23.860.120 | | CuZn | Sn | | | | | |
| | 23.860.310 | | CuSn | blank | | | | | |
| | 23.860.320 | | CuSn | Sn | | | | | |
| 24.060.110 | 0,5 – 1,0 | CuZn | blank | 9,5 | 7 | 4 | 0,5 | 10.000 | |
| 24.060.120 | | CuZn | Sn | | | | | | |
| 24.060.310 | | CuSn | blank | | | | | | |
| 24.060.320 | | CuSn | Sn | | | | | | |
| 24.360.110 | 0,5 – 1,0 | CuZn | blank | 9,5 | 7 | 4,3 | 0,5 | 10.000 | |
| 24.360.120 | | CuZn | Sn | | | | | | |
| 24.360.240 | | St | Ni | | | | | | |
| 24.360.310 | | CuSn | blank | | | | | | |
| 24.360.320 | | CuSn | Sn | | | | | | |