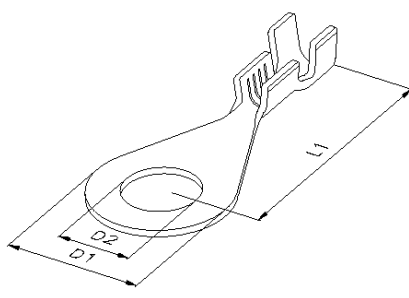
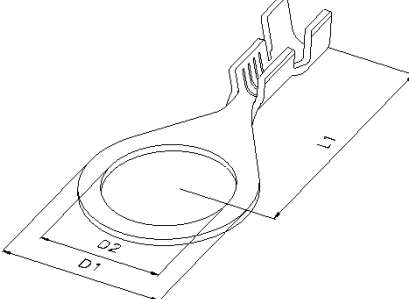


HS United European Connectors

Ringkabelschuh	Artikel-Nr.	Leiter- quer- schnitt	Material	Ober- fläche	L1	D1	D2	Mate- rial- stärke	Verp.- Ein- heit
		mm ²			mm	mm	mm	mm	
 <p>Längstransport * DIN 46 225</p>	26.512.110	0,5 – 1,0	CuZn	blank	22	12	6,5*	0,6	4.000
	26.512.120		CuZn	Sn					
	26.512.310		CuSn	blank					
	26.512.320		CuSn	Sn					
	28.412.110	0,5 – 1,0	CuZn	blank	22	12	8,4	0,6	4.000
	28.412.120		CuZn	Sn					
	28.412.310		CuSn	blank					
	28.412.320		CuSn	Sn					
Ringkabelschuh	Artikel-Nr.	Leiter- quer- schnitt	Material	Ober- fläche	L1	D1	D2	Mate- rial- stärke	Verp.- Ein- heit
		mm ²			mm	mm	mm	mm	
 <p>Längstransport * DIN 46 225</p>	26.513.110	0,5 – 1,0	CuZn	blank	21	14	6,5	0,6	4.000
	26.513.120		CuZn	Sn					
	26.513.310		CuSn	blank					
	26.513.320		CuSn	Sn					
	28.413.110	0,5 – 1,0	CuZn	blank	21	14	8,4*	0,6	4.000
	28.413.120		CuZn	Sn					
	28.413.310		CuSn	blank					
	28.413.320		CuSn	Sn					
	29.513.110	0,5 – 1,0	CuZn	blank	21	14	10,5	0,6	4.000
	29.513.120		CuZn	Sn					
	29.513.310		CuSn	blank					
	29.513.320		CuSn	Sn					