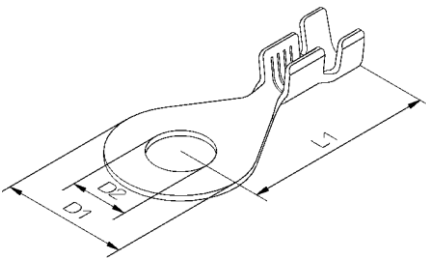
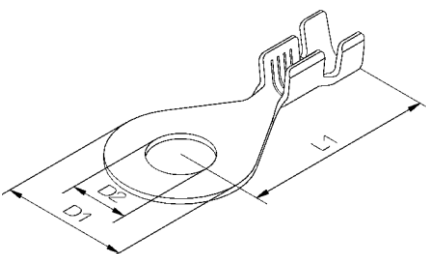


HS United European Connectors

Ringkabelschuh	Artikel-Nr.	Leiter- quer- schnitt	Material	Ober- fläche	L1	D1	D2	Mate- rial- stärke	Verp.- Ein- heit	
		mm ²			mm	mm	mm	mm		
 <p>Längstransport * DIN 46 225</p>	25.327.110	1,5 – 2,5	CuZn	blank	22	12	5,3	0,6	4.000	
	25.327.120		CuZn	Sn						
	25.327.310		CuSn	blank						
	25.327.320		CuSn	Sn						
	26.527.110	1,5 – 2,5	CuZn	blank	22	12	6,5*	0,6	4.000	
	26.527.120		CuZn	Sn						
	26.527.310		CuSn	blank						
	26.527.320		CuSn	Sn						
	28.427.110	1,5 – 2,5	CuZn	blank	22	12	8,4	0,6	4.000	
	28.427.120		CuZn	Sn						
	28.427.310		CuSn	blank						
	28.427.320		CuSn	Sn						
	 <p>Längstransport * DIN 46 225</p>	26.528.110	1,5 – 2,5	CuZn	blank	21	14	6,5	0,6	4.000
		26.528.120		CuZn	Sn					
		26.528.310		CuSn	blank					
		26.528.320		CuSn	Sn					
28.428.110		1,5 – 2,5	CuZn	blank	21	14	8,4*	0,6	4.000	
28.428.120			CuZn	Sn						
28.428.310			CuSn	blank						
28.428.320			CuSn	Sn						
29.528.110		1,5 – 2,5	CuZn	blank	21	14	10,5	0,6	4.000	
29.528.120			CuZn	Sn						
29.528.310			CuSn	blank						
29.528.320			CuSn	Sn						