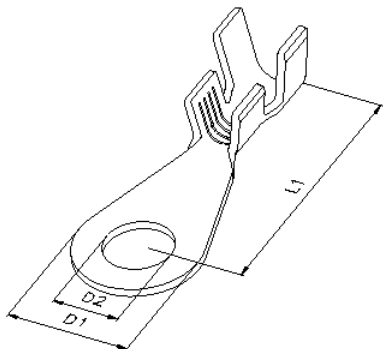


HS United European Connectors

Ringkabelschuh	Artikel-Nr.	Leiter- quer- schnitt	Material	Ober- fläche	L1	D1	D2	Mate- rial- stärke	Verp.- Ein- heit
		mm ²			mm	mm	mm	mm	
 <p>Längstransport * DIN 46 225</p>	25.362.110	2,5 - 6,0	CuZn	blank	25	12	5,3	0,8	2.000
	25.362.120		CuZn	Sn					
	25.362.310		CuSn	Sn					
	25.362.320		CuSn	blank					
	25.364.110	4,0 - 6,0	CuZn	Sn	25	12	5,3	0,8	2.000
	25.364.120		CuZn	blank					
	25.364.310		CuSn	Sn					
	25.364.320		CuSn	blank					
	26.562.110	2,5 - 6,0	CuZn	blank	25	12	6,5*	0,8	2.000
	26.562.120		CuZn	Sn					
	26.562.310		CuSn	blank					
	26.562.320		CuSn	Sn					
	26.564.110	4,0 - 6,0	CuZn	blank	25	12	6,5	0,8	2.000
	26.564.120		CuZn	Sn					
	26.564.310		CuSn	blank					
	26.564.320		CuSn	Sn					
	28.462.110	2,5 - 6,0	CuZn	blank	25	12	8,4	0,8	2.000
	28.462.120		CuZn	Sn					
	28.462.310		CuSn	blank					
	28.462.320		CuSn	Sn					
28.464.110	4,0 - 6,0	CuZn	blank	25	12	8,4	0,8	2.000	
28.464.120		CuZn	Sn						
28.464.310		CuSn	blank						
28.464.320		CuSn	Sn						