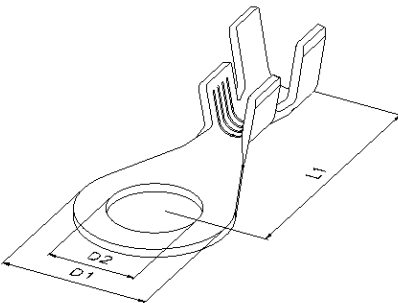


HS United European Connectors

Ringkabelschuh	Artikel-Nr.	Leiter- quer- schnitt	Material	Ober- fläche	L1	D1	D2	Mate- rial- stärke	Verp.- Ein- heit
		mm ²			mm	mm	mm	mm	
 <p>Längstransport * DIN 46 225</p>	26.563.110	2,5 - 6,0	CuZn	blank	24	14	6,5	0,8	2.000
	26.563.120		CuZn	Sn					
	26.563.310		CuSn	blank					
	26.563.320		CuSn	Sn					
	26.565.110	4,0 - 6,0	CuZn	blank	24	14	6,5	0,8	1.500
	26.565.120		CuZn	Sn					
	26.565.310		CuSn	blank					
	26.565.320		CuSn	Sn					
	28.463.110	2,5 - 6,0	CuZn	blank	24	14	8,4*	0,8	2.000
	28.463.120		CuZn	Sn					
	28.463.310		CuSn	blank					
	28.463.320		CuSn	Sn					
	28.465.110	4,0 - 6,0	CuZn	blank	24	14	8,4	0,8	1.500
	28.465.120		CuZn	Sn					
	28.465.310		CuSn	blank					
	28.465.320		CuSn	Sn					
	29.563.110	2,5 - 6,0	CuZn	blank	24	14	10,5	0,8	2.000
	29.563.120		CuZn	Sn					
	29.563.310		CuSn	blank					
	29.563.320		CuSn	Sn					
29.565.110	4,0 - 6,0	CuZn	blank	24	14	10,5	0,8	1.500	
29.565.120		CuZn	Sn						
29.565.310		CuSn	blank						
29.565.320		CuSn	Sn						