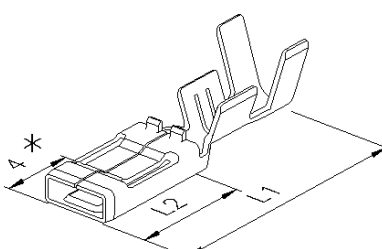


HS United European Connectors

Flachsteckhülse 2,8 mm leicht steckbar	Artikel-Nr.	Leiter- quer- schnitt	Material	Ober- fläche	Steck- dicke	L1	L2	Mate- rial- stärke	Verp.- Ein- heit
		mm ²			mm	mm	mm	mm	
 <p>Längstransport * = Abstand Rastpunkt</p>	72.808.114	0,25 – 0,5	CuZn	blank	0,4	14	6,5	0,25	15.000
	72.808.124		CuZn	Sn					
	72.808.314		CuSn	blank					
	72.808.324		CuSn	Sn					
	72.808.115	0,25 – 0,5	CuZn	blank	0,5	14	6,5	0,25	15.000
	72.808.125		CuZn	Sn					
	72.808.315		CuSn	blank					
	72.808.325		CuSn	Sn					
	72.808.110	0,25 – 0,5	CuZn	blank	0,8	14	6,5	0,25	15.000
	72.808.120		CuZn	Sn					
	72.808.310		CuSn	blank					
	72.808.320		CuSn	Sn					
	72.818.114	0,5 – 1,0	CuZn	blank	0,4	14	6,5	0,25	15.000
	72.818.124		CuZn	Sn					
	72.818.314		CuSn	blank					
	72.818.324		CuSn	Sn					
	72.818.115	0,5 – 1,0	CuZn	blank	0,5	14	6,5	0,25	15.000
	72.818.125		CuZn	Sn					
	72.818.315		CuSn	blank					
	72.818.325		CuSn	Sn					
	72.818.110	0,5 – 1,0	CuZn	blank	0,8	14	6,5	0,25	15.000
	72.818.120		CuZn	Sn					
	72.818.310		CuSn	blank					
	72.818.320		CuSn	Sn					