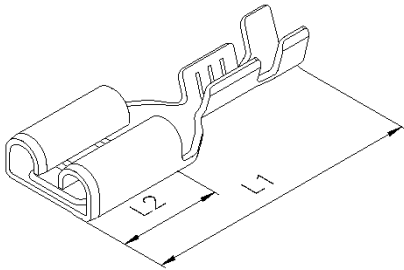
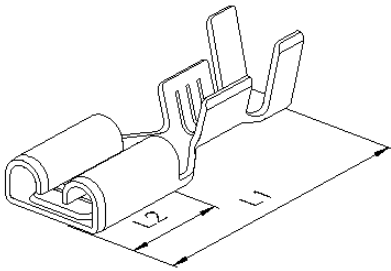


# HS United European Connectors

Flachsteckhülse 4,8 mm		Artikel-Nr.	Leiter- quer- schnitt  mm <sup>2</sup>	Material	Ober- fläche	Steck- dicke  mm	L1  mm	L2  mm	Mate- rial- stärke  mm	Verp.- Ein- heit
 <p>Längstransport</p>	24.803.115	0,25 – 0,5	CuZn	blank	0,5	16	6	0,35	12.000	
	24.803.125		CuZn	Sn						
	24.803.315		CuSn	blank						
	24.803.325		CuSn	Sn						
	24.803.110	0,25 – 0,5	CuZn	blank	0,8	16	6	0,35	12.000	
	24.803.120		CuZn	Sn						
	24.803.310		CuSn	blank						
	24.803.320		CuSn	Sn						
Flachsteckhülse 4,8 mm		Artikel-Nr.	Leiter- quer- schnitt  mm <sup>2</sup>	Material	Ober- fläche	Steck- dicke  mm	L1  mm	L2  mm	Mate- rial- stärke  mm	Verp.- Ein- heit
 <p>Längstransport *DIN 46 247 Blatt 2</p>	24.810.115	0,5 – 1,0	CuZn	blank	0,5	16	6	0,35	12.000	
	24.810.125		CuZn	Sn						
	24.810.315		CuSn	blank						
	24.810.325		CuSn	Sn						
	24.810.110	0,5 – 1,0	CuZn	blank	0,8*	16	6	0,35	12.000	
	24.810.120		CuZn	Sn						
	24.810.310		CuSn	blank						
	24.810.320		CuSn	Sn						
	24.825.115	1,0 – 2,5	CuZn	blank	0,5	16	6	0,35	10.000	
	24.825.125		CuZn	Sn						
	24.825.315		CuSn	blank						
	24.825.325		CuSn	Sn						
	24.825.110	1,0 – 2,5	CuZn	blank	0,8*	16	6	0,35	10.000	
	24.825.120		CuZn	Sn						
	24.825.310		CuSn	blank						
	24.825.320		CuSn	Sn						