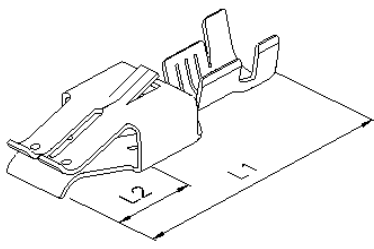


HS United European Connectors

Doppelflachkontakt 4,8 mm – 6,3 mm	Artikel-Nr.	Leiter- quer- schnitt	Material	Ober- fläche	Steck- dicke	L1	L2	Mate- rial- stärke	Verp.- Ein- heit
		mm ²			mm	mm	mm	mm	
 <p>Quertransport</p>	90.438.114	0,25 – 0,5	CuZn	blank	0,8	19,4	6	0,32	2.500
	90.438.124		CuZn	Sn					
	90.438.314		CuSn	blank					
	90.438.324		CuSn	Sn					
	90.538.114	0,5 - 0,75	CuZn	blank	0,8	19,4	6	0,32	2.500
	90.538.124		CuZn	Sn					
	90.538.314		CuSn	blank					
	90.538.324		CuSn	Sn					
	90.638.114	0,75 – 1,5	CuZn	blank	0,8	19,4	6	0,32	2.500
	90.638.124		CuZn	Sn					
	90.638.314		CuSn	blank					
	90.638.324		CuSn	Sn					
	90.858.114	1,0 – 2,5	CuZn	blank	0,8	19,4	6	0,32	2.500
	90.858.124		CuZn	Sn					
	90.858.314		CuSn	blank					
	90.858.324		CuSn	Sn					
	90.878.114	2 x 0,75 + AWG 20	CuZn	blank	0,8	19,4	6	0,32	2.500
	90.878.124		CuZn	Sn					
	90.878.314		CuSn	blank					
	90.878.324		CuSn	Sn					